

Spreader gate



Spreader gate 40 mm aluminum profiles with front hinge 130 mm.



Spreader gate 40 mm alu-profiles, hanging and turning, door type.



Spreader gate steel 5 mm with front hinge 130 alt. 250 mm.



Spreader gate steel alt. aluminum high-lift with slide locking. Automatic tailgate is deleted. Bottom extended 200 mm. (Not for side tip.)



Spreader gate steel alt. aluminum high-lift incl. automatic tailgate. (Not for side tip.)



Spreader gate steel front-hinge with integrated and openable/removable aluminum hatch.



Spreader gate steel front hinge 250 mm. Top edge lowered 200 mm.

Dumper dimensions

Dumper bottom plate thickness 5, 6, 8, or 10 mm in high-strength quality steel Hardox 500TUF.

Dumper sides plate thickness 4, 5, 6 or 8 mm in high-strength steel Hardox 450.

Length from 4400 mm with 100 mm length intervals.

Height side from 900 mm to 1400 mm with 100 mm height interval.

ZD4

Options for dumper ZD4

Automatic tailgate



Automatic tailgate standard height 400 mm. Pneumatic or hydraulic.



Automatic tailgate standard height 250 mm. Pneumatic or hydraulic.



Automatic tailgate HD height 250 mm. Hydraulic.

Automatic tailgate



Automatic tailgate HD height 400 mm. Hydraulic.

Mudguards




Mudguards straight in stainless steel, mounted in dumper body.




Mudguards round in plastic, mounted in chassis frame.

Vibrator

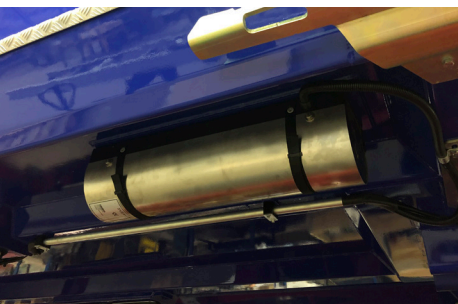

« **Vibrator** electric type Svea diesel.

» **Vibrator trailer** prepared incl. Solenoid and NATO connector. Maneuvering in cab.

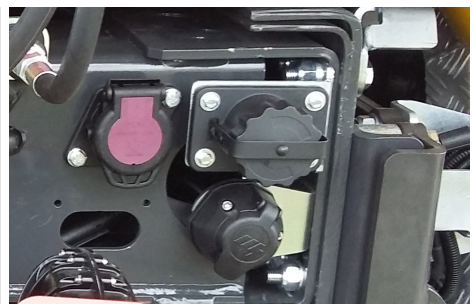

ZETTERBERGS

ZD4

Options for dumper ZD4

Extensions of side



Extensions height 400 mm of 40 mm aluminum profiles.

Protection of side



Protection for lower side profile on dumper, in aluminium.

Quick lowering valve

Quick lowering valve for front-mounted cylinder. Electrically activated via in-cab operation.

Equipment for plough



Front plow attachment front VV95.



Front plow attachment front Norway.



Side plow attachment and boom.

Grader blade




Grader blade in fixed or rotatable design.

Coupling



Coupling VBG 795 package incl. air servo, VBG 14 alt. 17.

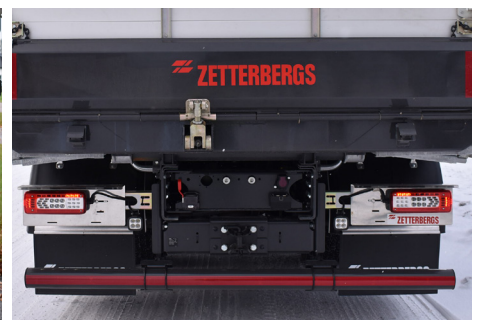

Towing hook

ZETTERBERGS

ZD4

Options for dumper ZD4

Toolbox




Toolbox in stainless steel. Length 300, 500, 600, 800 alt. 1000 mm. With or without edges on top.

Tool holder



Tool holder compact design. Electro-galvanized and yellow chromated. Mounted on the dumper.

Underrun protection

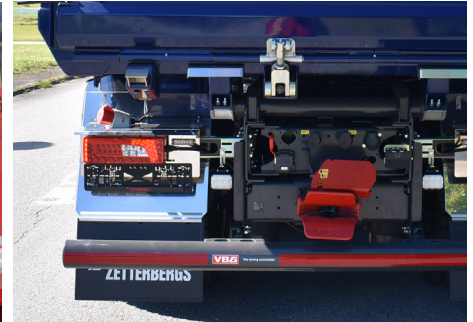

Rear underrun protection, steel.



Toolbox galvanized, open. Mounted on subframe side.



Tool holder frame mounted. Electro-galvanized and yellow chromated. Mounted on subframe.



Rear underrun protection, aluminium.

Trailer functions



Tipper hydraulics trailer signals and functions in many different variants.

Lighting



Flashlight ramp



Reverse lights

ZETTERBERGS

ZD4

Options for dumper ZD4

Lighting



Rotella



Worklight



Flashlight



Extra light



Plow lighting

Others

Surface treatment solid color with or without clear coat. Metallic incl. clear coat.

Side barrier alu-profile alt. stainless steel planks.

Hydraulic tank in aluminium, stainless steel or sheet metal for mounting behind the cab or outside the chassis frame in various sizes.

Hydraulic pump fixed, variable and double pumps in different sizes.

Air servo in cab. (Standard mounted in rear on bracket.)

Hydraulic oil standard alt. environmentally friendly.

Reverse camera.

Contact our sales staff if there are other requests and we will of course check the possibility of finding solutions!

ZETTERBERGS